MB Series Melt Blown Sediment Cartridges





Applications

- Aqueous Solutions
- Component Wash Fluids
- Coolants
- Cutting Fluids
- Fuels
- Light Oil
- Lubricants
- Mineral and Synthetic Oils
- Solvents
- Water
- Water Glycols



Tested and certified by NSF International against NSF/ANSI Standard 42 for material safety only

Residential/Commercial/Industrial Filtration Applications

Standard Features

- Spun bonded 100% polypropylene for economical and efficient filtration
- High dirt-holding capacity and high level of chemical compatibility
- Reduces sediment, dirt, and rust particles
- No glues or additives which could foam, discolor, or cause other undesirable effects for drinking water applications
- Filters available in standard 2-1/2" and 4-1/2" (BB-style) cartridge diameters
- 4 1/2" diameter graded density pore structure provides true depth-style filtration for higher dirt-holding capacity
- Tested and certified by NSF International to NSF/ANSI Standard 42 for material safety only

Product Specifications

Micron Ratings

1, 5, 20, 25, 50 microns

Cartridge Lengths

9-7/8", 20", 30", and 40"

Outside Diameter

2-1/2" and 4-1/2" OD

Temperature Rating

40°F - 175°F (4.4°C - 79.4°C)*

Initial Pressure Drop

<1psi typical

Materials of Construction

Filter Media: 100% Polypropylene

Certification


WPP Wound Depth Cartridges are tested and certified to: NSF/ANSI 61 Standard & NSF/ANSI 42 Standard for Component

*Temperature ratings vary and depend on pressure and time under load

Ordering Guide (Example: MB-25098-05)

MB -		25	098 - 05		·
ТҮРЕ	MEDIA	DIAMETER	CARTRIDGE LENGTH	MICRON RATING	GRADE
MB = Melt Blown Sediment Cartridge	Blank = Polypropylene (standard)	25 = 2.5" 45 = 4.5" Z = Custom	098 = 9-7/8" 200 = 20" 300 = 30" 400 = 40"	01 = 1 05 = 5 20 = 20 25 = 25 50 = 50	Blank = >80% (standard)

Dimensions

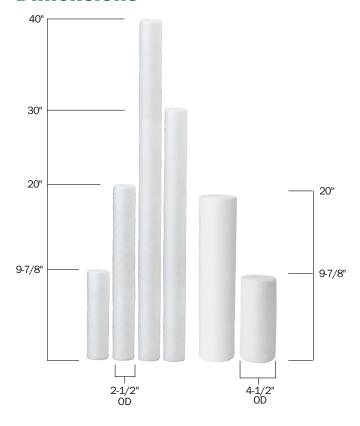

Case Packs

DIMENSIONS	QUANTITY
2-1/2" x 9-7/8"	50
2-1/2" x 19-1/2"	25
2-1/2" x 20"	25
2-1/2" x 29-1/4"	25
2-1/2" x 30"	25
2-1/2" x 40"	25
4-1/2" x 7/8"	12
4-1/2" x 20"	6





9450 SW Gemini Dr, ECM #83358, Beaverton, OR 97008 Tel 855.896.3525 · Fax 866.409.9622 www.neologicsolutions.com · info@neologicsolutions.com

STUART, FL \cdot BEAVERTON, OR \cdot GREENVILLE, SC \cdot SAN DIEGO, CA



Ask one of our Service Representatives: Mon-Fri 8a-8p, Sat 8:30a-4:30p EST

